



COVER CAP FOR 40 MM MODULAR DIMENSION

MODEL	40 mm modular dimension
DESCRIPTION	To cover the end of the profile
MATERIAL	Plastic PA, glass fibre reinforced, * glass ball reinforced
COLOR	Black, gray
PACK QUANTITY	100 pieces
SPECIALS	ESD electrostatical discharging, other sizes, other colors on request



Color	Dimensions A x B [mm]	Feature	R [mm]	T [mm]	Slot	ØD [mm]	Weight [g]	Profile	Part #
Black	16 x 40	2 pins	3.5	4.0	8	5.1 (5.0)	2.0	I	091077
Gray ≈ RAL 7042	16 x 40	2 pins	3.5	4.0	8	5.1 (5.0)	2.4	I	091077S01
Black	16 x 80	2 pins	3.5	4.0	8	4.4 (4.3)	4.2	I	091078
Gray ≈ RAL 7042	16 x 80	2 pins	3.5	4.0	8	4.4 (4.3)	4.2	I	091078S01
Black	16 x 80	2 crosses, 1 pin	3.0	4.0		5.0	7.0		091132
	16 x 120	2 crosses, 2 pins	3.0	4.0		4.9	8.9		091133
	16 x 160	6 pins	3.5	4.0	8	4.3 (4.0)	8.3	I	091278
Gray ≈ RAL 7042	16 x 160	6 pins	3.5	4.0	8	4.3 (4.0)	8.3	I	091278S02
Black	40 x 40	1 Kreuz	3.5	4.0		7.0	6.7		091014
	40 x 40	1 Pin for core hole	1.5	4.0		14.2	7.1		091162
	40 x 40	4 crosses	2.5	4.0		4.5	7.2		091124
	40 x 40	1 Kreuz	2.5	4.0		7.5	7.0		091139
	40 x 40	1 Kreuz	2.5	4.0		10.3	7.3		091138
	40 x 40	1 cross turned 25°	3.5	3.0		12.8	6.9		091119
	40 x 40	1 Kreuz	3.5	4.0	8	7.1 (6.8)	6.7	I	091007
	40 x 40	1 cross *	3.5	4.0	8	7.1 (6.8)	6.3	I	091007S13
Gray ≈ RAL 7042	40 x 40	1 Kreuz	3.5	4.0	8	7.1 (6.8)	6.7	I	091007S17
Black	40 x 40	1 cross turned 45°	3.5	4.0		7.5	6.5		091040
	40 x 40	1 Kreuz	3.5	4.0		8.8	6.4		091092
	40 x 40	1 Kreuz	3.5	4.0		10.1	7.0		091192
	40 x 40	1 Kreuz	3.5	4.0		11.3	6.1		091196
	40 x 40	1 Kreuz	3.5	4.0		12.4	7.0		091008
	40 x 40	1 Kreuz	3.5	4.0		14.2	6.8		091190
	40 x 40	4 cross	3.0	5.0			7.0		091328
	40 x 40 45°	1 Kreuz	4.0	4.0		6.9	5.1		091003
	40 x 40	4 Pins for core hole, With hole Ø 10.3	4.0	4.0	8	6.0	6.1	I	091387
	Gray ≈ RAL 7042	40 x 40	4 Pins for core hole, With hole Ø 10.3	4.0	4.0	8	6.0	5.0	I
Black	40 x 40 45°	1 Kreuz	4.0	4.0	8	7.0 (6.8)	5.3	I	091048

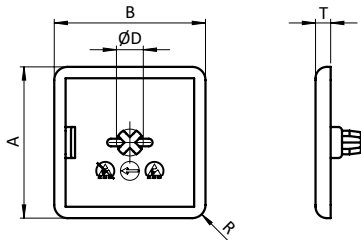

COVER CAP FOR 40 MM MODULAR DIMENSION

Color	Dimensions A x B [mm]	Feature	R [mm]	T [mm]	Slot	ØD [mm]	Weight [g]	Profile	Part #
Gray ≈ RAL 7042	40 x 40 45°	1 Kreuz	4.0	4.0	8	7.0 (6.8)	5.2	I	091048S01
Black	40 x 40 R40 - 90°	New version, 1 cross	4.0	4.0	8	6.8 (6.8)	5.5	I	091320
Gray ≈ RAL 7042	40 x 40 R40 - 90°	New version, 1 cross	4.0	4.0	8	6.8 (6.8)	5.4	I	091320S02
Black	40 x 40 R40 - 90°	1 Kreuz	2.5	4.0	8	7.2 (6.8)	5.8	I	091045
Gray ≈ RAL 7042	40 x 40 R40 - 90°	1 Kreuz	2.5	4.0	8	7.2 (6.8)	5.8	I	091045S01
Black	40 x 40 R40 - 90°	1 Pin for core hole	2.5	4.0		7.4	5.6		091221
	40 x 80	2 crosses	4.0	4.0	8	6.9 (6.8)	13.3	I	091009
	40 x 80	2 crosses *	4.0	4.0	8	6.9 (6.8)	12.3	I	091009S10
Gray ≈ RAL 7042	40 x 80	2 crosses	4.0	4.0	8	6.9 (6.8)	13.6	I	091009S14
Black	40 x 80	2 crosses	3.0	4.0		7.0(6.8)	13.3	I	091013
	40 x 80	2 crosses turned 45°	3.0	4.0		7.6	13.1		091041
	40 x 80	2 crosses	3.0	4.0		10.1(10.0)	13.6	B	091193
	40 x 80	2 crosses, ESD electrostatical discharging	3.0	4.0		10.1 (10.0)	11.4	B	091193S02
Gray ≈ RAL 7004	40 x 80	2 crosses	3.0	4.0		10.1 (10.0)	13.4	B	091193S03
Black	40 x 80	2 crosses	3.0	4.0		11.2	14.0		091197
	40 x 80	2 crosses	3.0	4.0		12.3	13.6		091010
	40 x 80	2 crosses turned 30°	3.0	4.0		12.8	13.5		091127
	40 x 120	1 cross and 2 pins	3.0	4.0	8	6.9 (6.8)	21.3	I	091094
	40 x 120	1 cross 2 pins, ESD electrostatical discharging	3.0	4.0		6.95	18.4		091094S02
Gray ≈ RAL 7042	40 x 120	1 cross and 2 pins	3.0	4.0	8	6.9 (6.8)	21.3	I	091094S01
Black	40 x 160	2 crosses and 2 pins	3.5	4.0	8	6.9 (6.8)	27.5	I	091209
Gray ≈ RAL 7042	40 x 160	2 crosses and 2 pins	3.5	4.0	8	6.9 (6.8)	27.0	I	091209S01
Black	80 x 80	4 crosses	3.0	4.0	8	7.5	27.6		091136
	80 x 80	4 crosses	4.0	4.0	8	6.8 (6.8)	28.1	I	091023
	80 x 80	4 crosses, ESD electrostatical discharging	4.0	4.0	8	6.8 (6.8)	25.0	I	091023S03
	80 x 80	4 crosses *	4.0	4.0	8	6.8 (6.8)	21.0	I	091023S06
Gray ≈ RAL 7042	80 x 80	4 crosses	4.0	4.0	8	6.8 (6.8)	28.6	I	091023S09
Black	80 x 80	4 crosses	4.0	4.0		11.3	28.0		091200
	80 x 120	4 crosses	3.5	4.0	8	6.9 (6.8)	45.6	I	091095
Gray ≈ RAL 7042	80 x 120	4 crosses	3.5	4.0	8	6.9 (6.8)	46.0	I	091095S01
Black	80 x 120	4 crosses	3.5	4.0		11.3	40.8		091206
	80 x 160	8 pins	4.0	4.0	8	6.8 (6.8)	58.7	I	091118
Gray ≈ RAL 7042	80 x 160	8 pins	4.0	4.0	8	6.8 (6.8)	61.0	I	091118S01
Black	80 x 160	8 support ribs 11.3 x 2.0	4.0	4.0		11.3	59.8		091205
	R40 x R80 30°	2 pins	4.0	4.0		7.1	5.7	I	091114
Gray ≈ RAL 7042	R40 x R80 30°	2 pins	4.0	4.0	8	7.1	6.0	I	091114S01



COVER CAP FOR 40 MM MODULAR DIMENSION

Color	Dimensions A x B [mm]	Feature	R [mm]	T [mm]	Slot	ØD [mm]	Weight [g]	Profile	Part #
Black	R40 x R80 45°	1 Kreuz	4.0	4.0		6.8	8.1	I	091115
	R40 x R80 60°	1 Kreuz	4.0	4.0		7.0	10.3	I	091116
Gray ≈ RAL 7042	R40 x R80 60°	1 Kreuz	4.0	4.0		7.0	10.0	I	091116S01
Black	R40 x R80 90°	2 crosses	4.0	4.0		6.8	16.7	I	091117
Gray ≈ RAL 7042	R40 x R80 90°	2 crosses	4.0	4.0		6.8	17.0	I	091117S01
Black	40 x 40	1 Kreuz	2.5	4.0	10	10.2 (10.0)	7.1	B	091046
Gray ≈ RAL 7004	40 x 40	1 Kreuz	2.5	4.0	10	10.2 (10.0)	7.0	B	091046S06
Black	40 x 40	ESD electrostatical dis- charging, 1 pin for core hole	3.0	4.0	10	10.4 (10.0)	5.4	B	091345S01
Gray ≈ RAL 7004	40 x 40 R33.3 - 90°	1 Pin for core hole	3.0	4.0	10	10.4 (10.0)	5.3	B	091345S02
Black	40 x 80	2 crosses	3.0	4.0	10	10.1 (10.0)	13.3	B	091137
	80 x 80	4 crosses	3.0	4.0	10	10.4 (10.0)	28.0	B	091135
	80 x 80	4 crosses, ESD electro- statical discharging	3.0	4.0	10	10.4 (10.0)	26.2	B	091135S01
Gray ≈ RAL 7004	80 x 80	4 crosses	3.0	4.0	10	10.4 (10.0)	28.4	B	091135S02